



Columbus JACK/Regent

“The Strength of Experience”

PRODUCT DATA SHEET

FIXED HEIGHT TRIPOD JACK


Model 15100-35, 15 Ton Capacity

Standard Features

- ◆ Constructed for ease of assembly, operation and maintenance
- ◆ Manual & Air Powered Pumping Units, Dual Reading Pressure Gauge Assembly (Reading in Tons/PSI)
- ◆ Steel Reservoir
- ◆ Mechanical Lock Nut
- ◆ Access Ladder
- ◆ Spring Loaded Swivel Casters
- ◆ Adjustable Leveling Footpad with Bubble Level
- ◆ Protective Cylinder Rain Cover
- ◆ Skydrol Resistant Yellow Paint or to customer specifications

Documentation

- ◆ Operation and Maintenance Manual
- ◆ Certificate of Conformance
- ◆ Load Test Reports
- ◆ Factory New - 36 Month Written Warranty

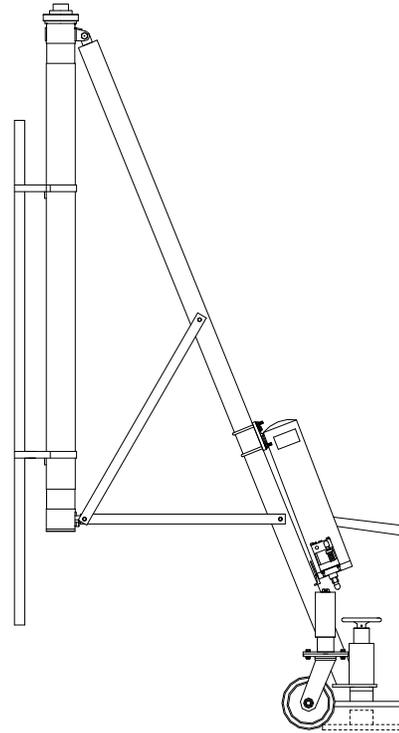

Our Fixed Height Tripod Jacks are used on and for specific aircraft jacking applications during normal aircraft maintenance checks. Our tripod jacks are designed and built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service.

FIXED HEIGHT TRIPOD JACK SPECIFICATIONS							
VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	SCREW EXTENSION (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	CRATED WEIGHT (Est.) (Lbs/kg)	CRATE DIMENSIONS (Est. - L x W x H) (Inches/mm)	CU FT CRATED (Est.) (Cu ft/cu m)
15.0	100.0	40.0	15.0	155.0			
13.6	2,540	1,016	381	3,937			




ISO 9001:2008

Columbus JACK/Regent

"The Strength of Experience"

FIXED HEIGHT TRIPOD JACK

Model 15100-35, 15 Ton Capacity

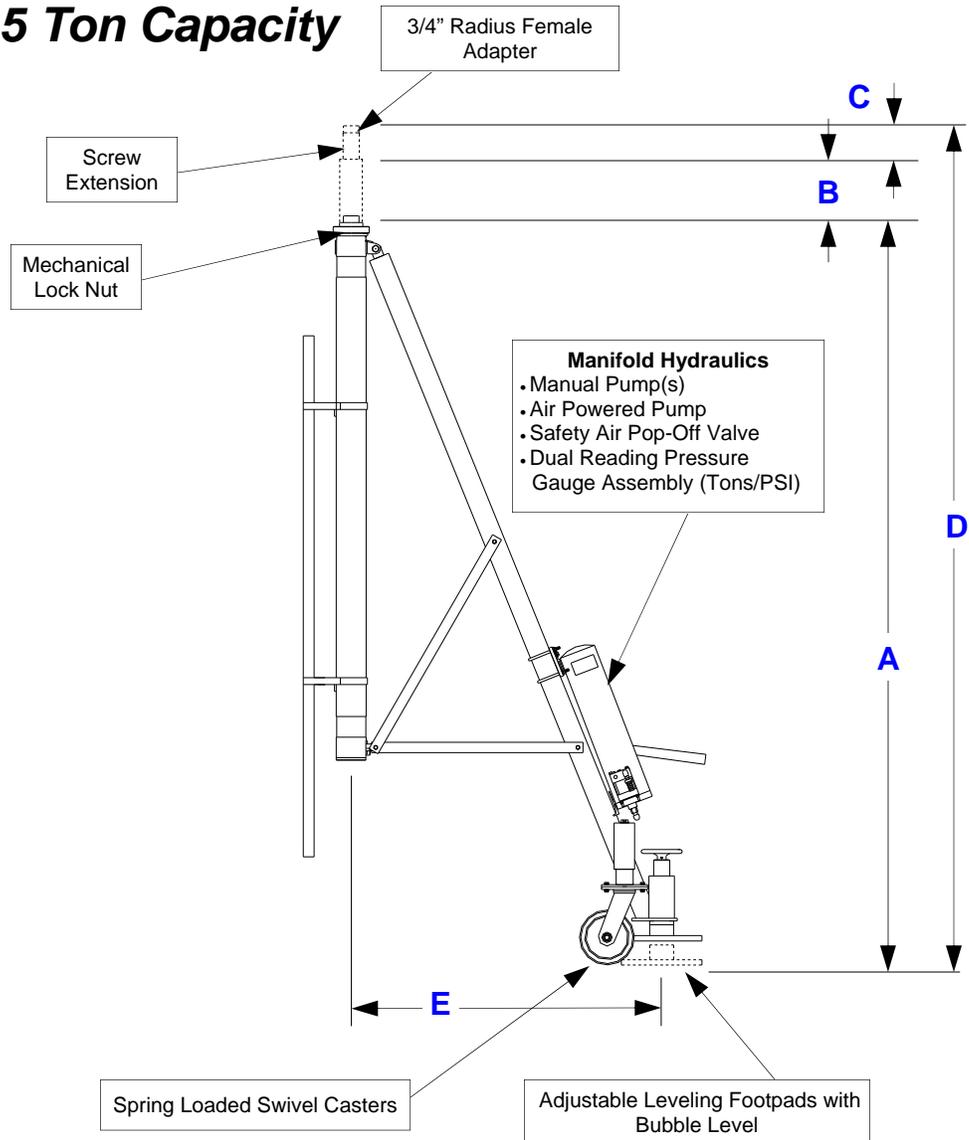

FIXED HEIGHT TRIPOD JACK SPECIFICATIONS					
	A	B	C	D	E
VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM CLOSED HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	SCREW EXTENSION (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	TRIPOD RADIUS (Inches/mm)
15.0	100.0	40.0	15.0	155.0	45.0
13.6	2,540	1,016	381	3,937	1,143