



# ColumbusJACK/Regent

*"The Strength of Experience"*

## PRODUCT DATA SHEET

# FIXED HEIGHT TRIPOD JACK

*Model 2054-35, 20 Ton Capacity*

### Standard Features

- ◆ Constructed for ease of assembly, operation and maintenance
- ◆ Manual & Air Powered Pumping Units, Dual Reading Pressure Gauge Assembly (Reading in Tons/PSI)
- ◆ Steel Reservoir
- ◆ Mechanical Lock Nut
- ◆ Spring Loaded Swivel Casters
- ◆ Adjustable Leveling Footpad with Bubble Level
- ◆ Protective Cylinder Rain Cover
- ◆ Skydrol Resistant Yellow Paint or to customer specifications

### Documentation

- ◆ Operation and Maintenance Manual
- ◆ Certificate of Conformance
- ◆ Load Test Reports
- ◆ Factory New - 36 Month Written Warranty



Our Fixed Height Tripod Jacks are used on and for specific aircraft jacking applications during normal aircraft maintenance checks. Our tripod jacks are designed and built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service.

<b>FIXED HEIGHT TRIPOD JACK SPECIFICATIONS</b>							
<b>VERTICAL CAPACITY</b> (Tons/m tonnes)	<b>MINIMUM HEIGHT</b> (Inches/mm)	<b>HYDRAULIC LIFT</b> (Inches/mm)	<b>SCREW EXTENSION</b> (Inches/mm)	<b>MAXIMUM EXTENDED HEIGHT</b> (Inches/mm)	<b>CRATED WEIGHT</b> ( Est. ) (Lbs/kg)	<b>CRATE DIMENSIONS</b> (Est. - L x W x H) (Inches/mm)	<b>CU FT CRATED</b> ( Est. ) (Cu ft/cu m)
<b>20.0</b>	<b>54.0</b>	<b>40.0</b>	<b>15.0</b>	<b>109.0</b>			
18.2	1,372	1,016	381	2,769			



# Columbus JACK/Regent

*"The Strength of Experience"*

ISO 9001:2008


## FIXED HEIGHT TRIPOD JACK

**Model 2054-35, 20 Ton Capacity**

JACKING APPLICATIONS		
FWD	WINGS	AFT
B717	---	---
---	---	B727
B737*	---	---
---	---	MD80
---	---	MD90

\* Includes all B737 Series.

- Manifold Hydraulics**
- Manual Pump(s)
  - Air Powered Pump
  - Safety Air Pop-Off Valve
  - Dual Reading Pressure Gauge Assembly (Tons/PSI)

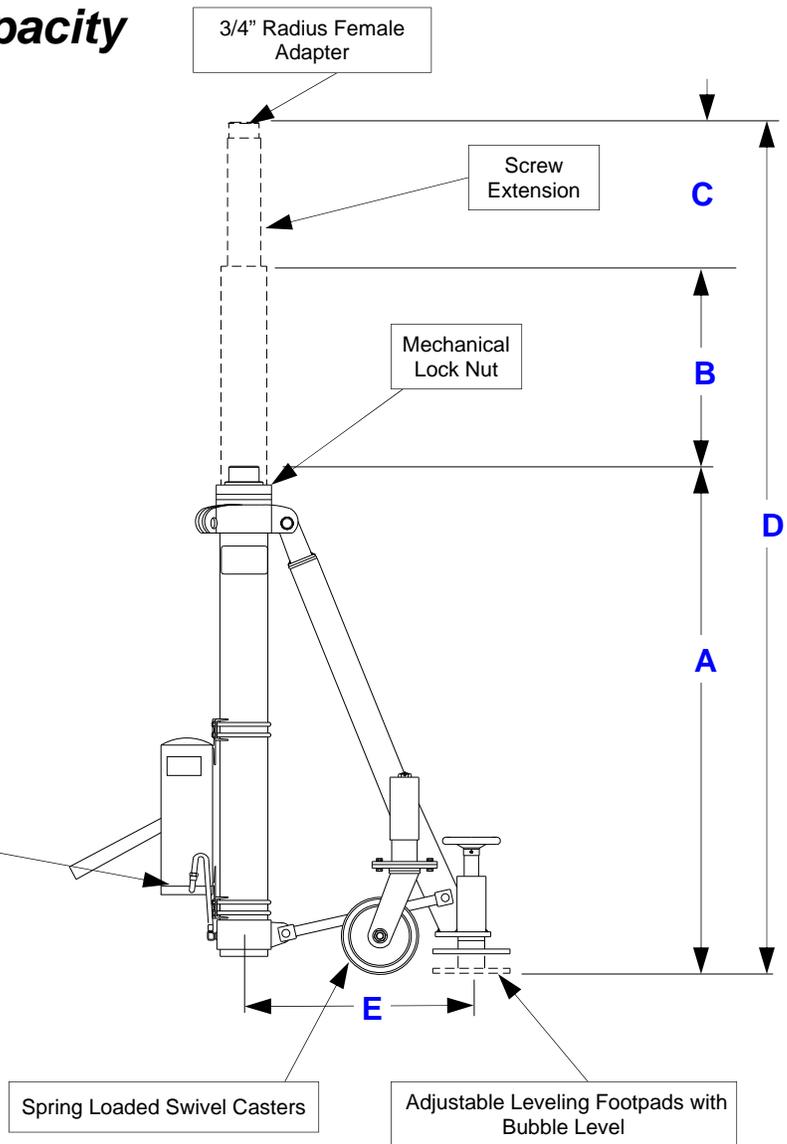

FIXED HEIGHT TRIPOD JACK SPECIFICATIONS					
	A	B	C	D	E
VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM CLOSED HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	SCREW EXTENSION (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	TRIPOD RADIUS (Inches/mm)
20.0	54.0	40.0	15.0	109.0	33.0
18.2	1,372	1,016	381	2,769	838